



*

- -
- -
(// // //)

...

- - - :

Cafo
Fendolite

Laf
Vermix - M2

/ D8-advance


)
(
()


Moscovite , Biotite

Biotite HydroBiotite
[]

Illite Clinohumite

()
()

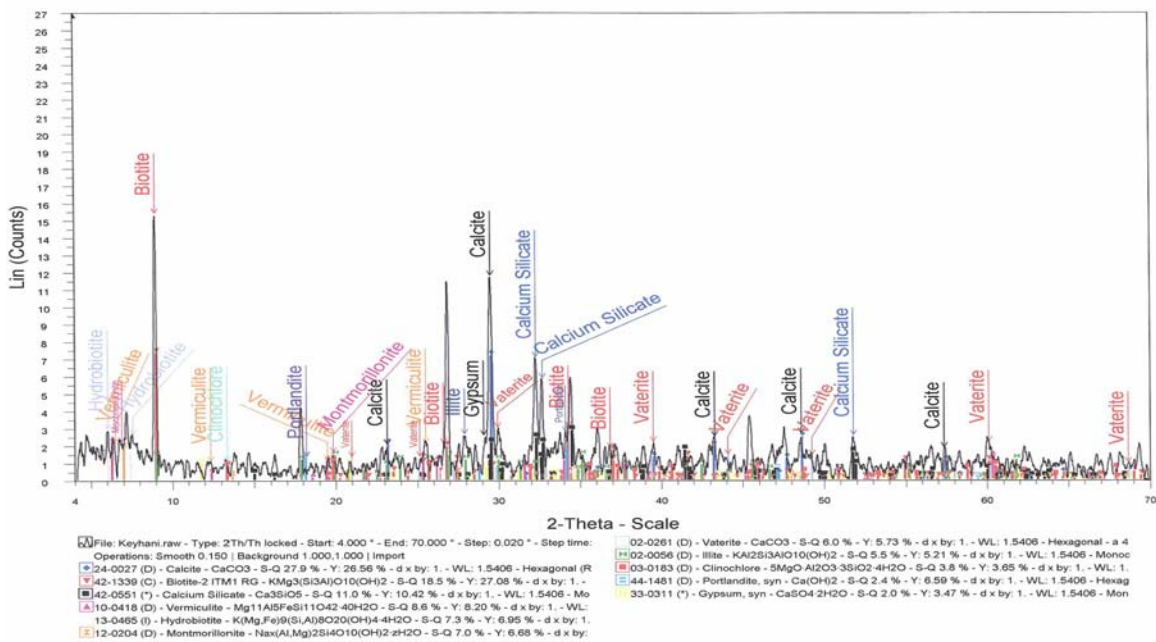

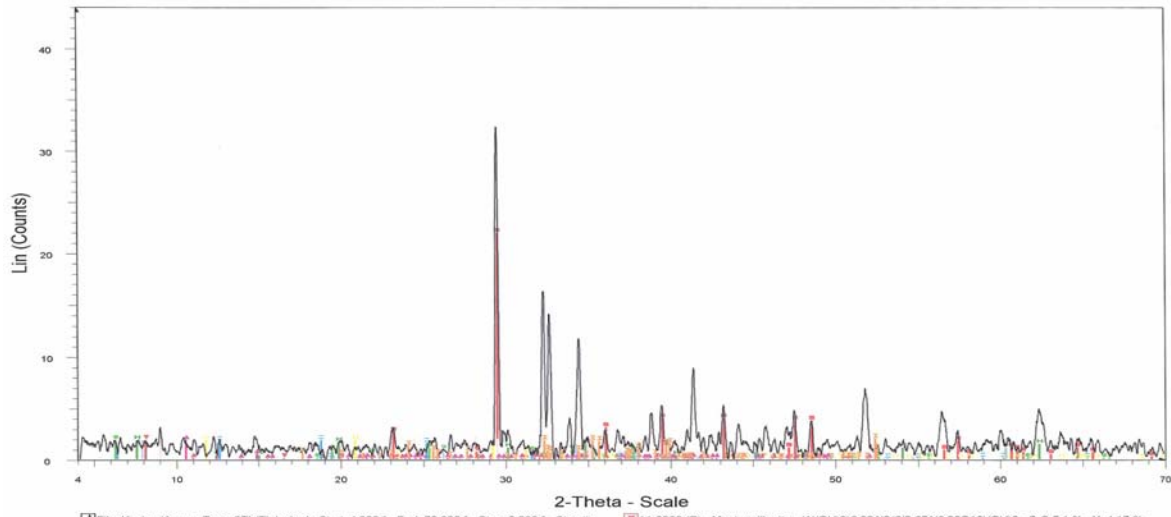

File: KeyhaniA.raw - Type: 2Th/Th locked - Start: 4.000 ° - End: 70.000 ° - Step: 0.020 ° - Step tim
 Operations: Smooth D:150 | Background: 1.000, 1.000 | Import

05-0586 (*) - Calcite, syn - CaCO₃ - S-Q 30.7 % - Y: 50.00 % - d x by: 1 - WL: 1.5406 - Hexagona
 34-0175 (C) - Muscovite-2 (TM2) RG - (K,Na)Al₂(Si₃Al)4O₁₀(OH)₂ - S-Q 21.2 % - Y: 6.25 % - d x b
 33-0867 (C) - Clinohumite, titanian - (Mg,Fe,Ti)9(Si4)4(OH,OH)₂ - S-Q 14.7 % - Y: 4.51 % - d x by
 02-0037 (D) - Montmorillonite - AlSi₂O₆(OH)₂ - S-Q 5.1 % - Y: 4.17 % - d x by: 1 - WL: 1.5406 -
 10-0419 (D) - Vermiculite - Mg₃Al₂Si₄O₁₀(OH)₂ - S-Q 5.1 % - Y: 4.17 % - d x by: 1 - WL:
 10-0362 (D) - Hydroblotte - K-Mg-Fe-Si-Al-Fe-O-OH-H₂O - S-Q 5.1 % - Y: 4.17 % - d x by: 1 - W

11-0303 (D) - Montmorillonite - (Al(OH)2)0.33Al2(Si3.67Al0.33O10)(OH)2 - S-Q 5.1 % - Y: 4.17 %
 29-0312 (I) - Hydrochlorite - Ca2B4O4(OH)7Cl·7H2O - S-Q 5.1 % - Y: 4.17 % - d x by: 1 - WL:
 12-0185 (D) - Clinechlorite - (Mg,Fe,Al)6(Si,Cr)4O10(OH)8 - S-Q 5.1 % - Y: 4.17 % - d x by: 1 - WL:
 33-0311 (*) - Gypsum, syn - CaSO₄·2H₂O - S-Q 2.8 % - Y: 4.17 % - d x by: 1 - WL: 1.5406 - Mon

Vermiculite		
Mika		
Portland Cement		
CaCO ₃		
Montmorillonite		
Gypsum		

/

/ - pH

- kg/m³

- °C

- kg/m³


- kg/m³

pH °C

°C

- °C

[] / - / kJ/kgK



) Mg, Ca . / -
 (

" "

% /		
% / - /		
% / - /		

$H_2KAl_3(SiO_4)_3$
 / - / kg/m^3
 / - /
 $^{\circ}C$
 . [] kJ/kgK

()

(kJ/kgK)	(W/m $^{\circ}C$)	
/ - /	/ - /	
/	/	

()

()

[]

k

k

$^{\circ}C$
 $\pm ^{\circ}C$

+	+	+	
	+	+	
	+		
+			
	+		

[]

Interval cen.C.P.I.G



[]

T
T
T
()
()

[] :


	()
	()
	()
$l \text{ kg/m}^3$	
$l \text{ W/m}^\circ\text{C}$	
$\text{kJ/kg}^\circ\text{C}$	

()

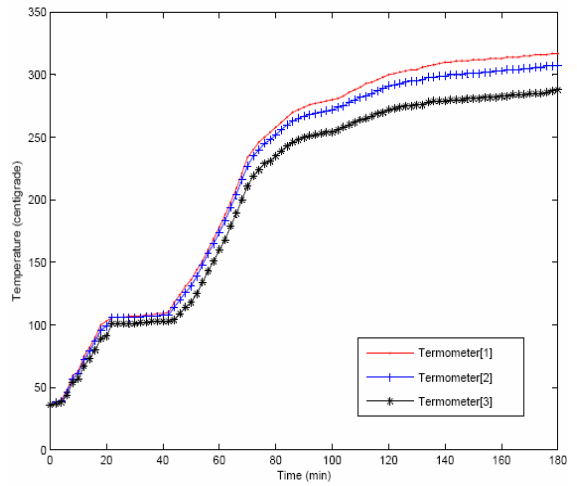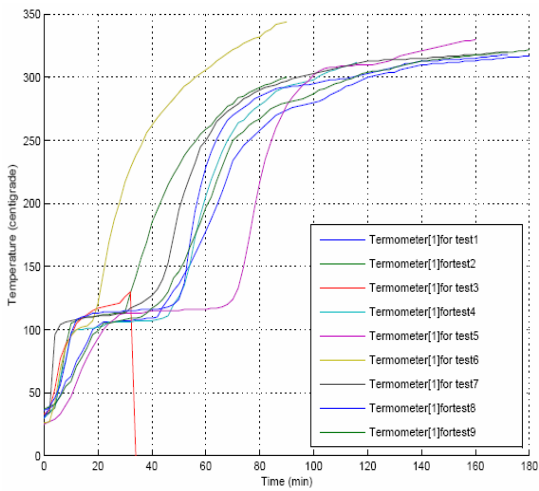

() ()

	-	-	-	-	-	-	-
	/	/			/	/	
	/	/					
	/	/					

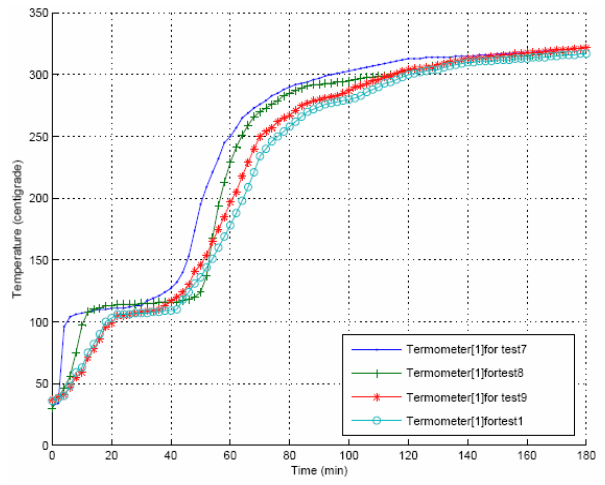

[]

°C

()

[] :

	()
	()
	()
$l \text{ kg/m}^3$	
$l \text{ W/m}^\circ\text{C}$	
$l \text{ Kj/Kg}^\circ\text{C}$	

[] :

	()
	()
	()
$l \text{ kg/m}^3$	
$l \text{ w/m}^\circ\text{C}$	
$l \text{ kj/kg}^\circ\text{C}$	

() ()

- 1 - Gharaviski, G. H. (2003). *Determination of paint*. Vol. 2.
- 2 - <http://www.ngdir.org>
- 3 - <http://www.cafco.com>
- 4 - <http://www.mindat.com>
- 5 - Ciullo, P. A. (1996). *Industrial Minerals and their Uses a Handbook and Formulary*. William and Rew publishing.
- 6 - Keyhan, K. and Hamidi, A. A. (2007). *Investigation, preparation and thermal performance study of fire proofing of steel structures by Vermiculite compounds*.
- 7 - Kristkova, M., Weiss, Z. and Filip, P. (2004). *Hydration properties of vermiculite in phenolic resin*. Science, Vol. 25, PP. 229- 236.
- 8 - Al-Homoud, M. S. (2005). *Performance characteristics and applications of common building thermal insulation materials*, Building and Environment, Vol. 40, PP. 353-366.